

Triple Line Lifter - 2500




TLL-2500 Specifications:

- Hydraulic articulation, extension & retraction
- Conductor spacing: 10 ft. – 24 ft.
- Quick Attach Insulators & Wire Holders
- Field Testable Insulators

Voltage (#) Conductors	Capacity (lb) per conductor
115kV (3) conductors	2500/7500 total
138kV (3) conductors	2500/7500 total
161kV (3) conductors	2500/7500 total
230kV (3) conductors	2500/7500 total
345kV (2) conductors	5000 total

- Vertical and horizontal construction
- Hydraulic functions (4)
- High Strength Steel fabrication
- Holding valves on all cylinders
- Manual override control valve
- Handheld Radio Remote Control
- Installed at ground level
- Unit weight: 6,000 lbs.
 - Mounted in skid: 7,500 lbs.
- Mounting: Boom truck / Cranes

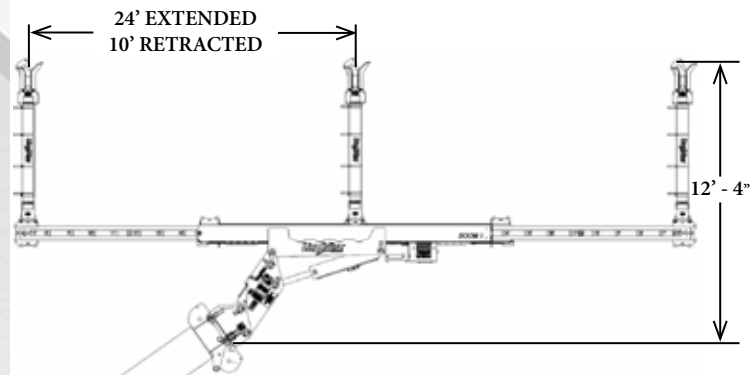

LineWise
by Diversified Products


254-757-1177

www.line-wise.com

The phase lifter is an insulated crane attachment used to support up to three energized lines.

Transportation Skid:

- Fork pockets
- Lift Rigging
- Compartments for:
 - Insulators
 - Wire holders & pins
- 4 corner jacks to level skid to crane.
- Steps/handrails on each side to access boom tip for installation.

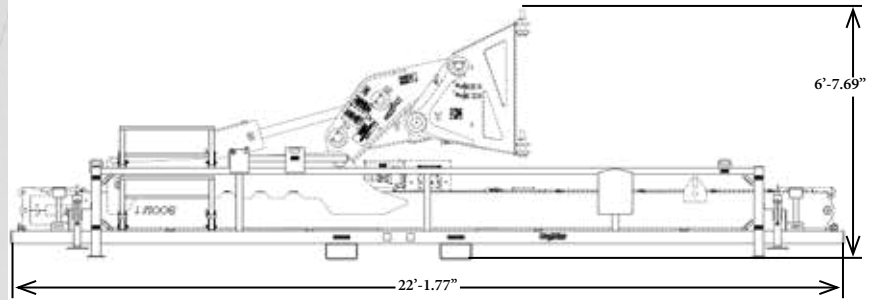

Hydraulic Power Unit:

- 24HP Gas Engine/ Electric Start
- 130 ft. of nonconductive hose (2)
- Hose reel with power return
- 2,500 psi and 10 gpm
- Fork pockets
- 4 lifting rings with rigging

1001 Webster Avenue
Waco, TX 76706
254-757-1177
sales@line-wise.com
www.line-wise.com



INSPIRED BY LINEMEN TESTED BY LINEMEN TRUSTED BY LINEMEN

LineWise



*Photos and diagrams are for promotional purposes only.
Product design and specifications may change without notice or obligation.*

©2020 Diversified Products