

The TLL-500A-S3 is an insulated crane/digger derrick attachment used to support up to three energized lines.

### The TLL-500A-S3

- Maximum capacity of 500 pounds per phase for a total capacity of 1500 pounds.
- Faster set up time.
- Radio remote provides the crew in the bucket with complete control of the unit's functions and avoids having to relay desired movements to ground personnel working the controls.
- Ability to capture phases and neutrals/statics with the same crane/digger derrick. Reducing the equipment needed at a job site and further eliminates shutdown of sub-transmission lines for maintenance.
- One base unit can fit multiple crane/digger derrick models with additional adapters and load charts.



### FEATURES

- Hydraulic articulation, extension & retraction
- Quick attach insulators & wire holders
- Insulators are lab tested
- Operation, Maintenance and Parts manual included
- Custom load charts for your crane/digger derrick model(s)
- Vertical and horizontal line construction
- High strength steel fabrication
- Holding valves on all cylinders
- Manual override control valve
- Handheld radio remote control
- Installed at ground level



### Hydraulic Power Unit

- 2,600 psi and 4 gpm
- Gasoline engine 7.5HP / electric start

### Transportation Skid

- Fork pockets
- Compartments for:
  - Insulators, wire holders & pins
- 4 corner jacks to level skid to crane
- Lift rigging and tie down points




### SPECIFICATIONS

Voltage (#) Phases	Capacity per phase
34.5 kV (3) phases	500 lb (225 kg)/1500 (680 kg) total
69 kV (3) phases	500 lb (225 kg)/1500 (680 kg) total
Total unit weight (Approx.)	
TLL-500A-S3 with skid	2075 lb (941 kg)
TLL-500A-S3 w/o skid	1155 lb (524 kg)
Max. Phase Spacing	
Outside to Outside	16' (4877 mm)
Center to Outside	8' (2438 mm)
Min. Phase Spacing	
Outside to Outside	7' 10" (2388 mm)
Center to Outside	3' 11" (1194 mm)
Maximum Horizontal Load per Phase	500 lb (225 kg)
Maximum Vertical Load per Phase	500 lb (225 kg)
Insulator	Polymer
Hydraulic	Yes
Mounting	Crane/Digger Derrick

### CONFIGURATIONS




Vertical Configuration

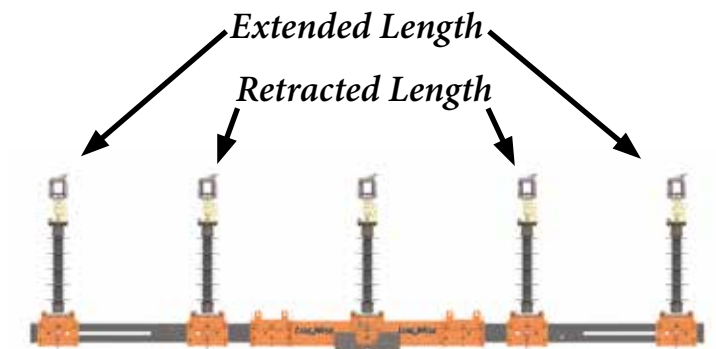


Horizontal Configuration

# OPTIONS



- Adapter to use with different crane
- Product operational by hydraulics on crane/digger derrick or with a separate hydraulic power unit (HPU)
- 34.5kV/69kV Sealed Fiberglass Insulators
- Fully covered skid
- Field installation and training with every unit

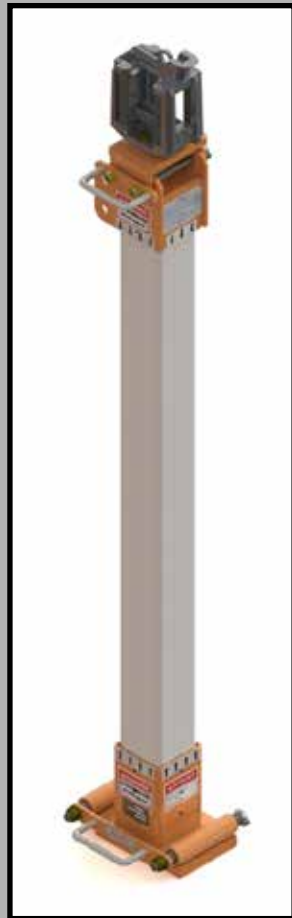

Fiberglass Insulators

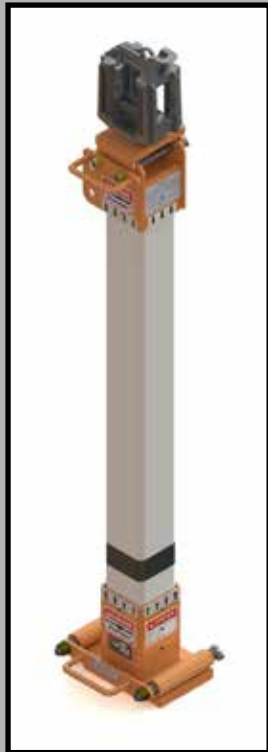

Polymer Insulators

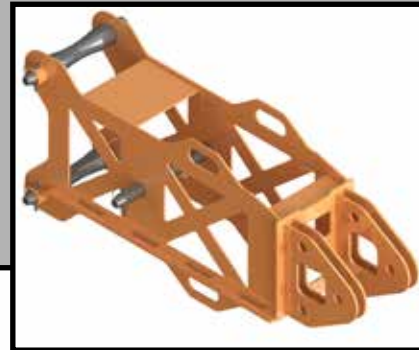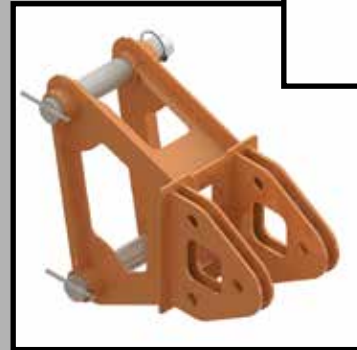

Adapters



**LINEWISE**

Triple Line Lifter-500A-Series 3

**LineWise**



INSPIRED BY LINEMEN TESTED BY LINEMEN TRUSTED BY LINEMEN

Material and specifications are subject to change without notice. Units in photos may include optional features. Contact a LineWise representative for available options. LineWise® and the LineWise logo are registered trademarks of Diversified Product Development and may not be used without permission. © 2020 Diversified Product Development All Rights Reserved.

**LW** 254-757-1177 | sales@line-wise.com | line-wise.com

254-757-1177 | sales@line-wise.com | line-wise.com