

LINEWISE[®]

*Customized
Electric
Spacer Cart*




Spacer Cart

254-757-1177 | sales@line-wise.com | line-wise.com

SPECIFICATIONS

Dimensions	40" x 74" x 56" tall 1016 mm x 1880 mm x 1422 mm tall
Capacity	600 lb (272 kg)
Weight	800 lb (363 kg)
Max Speed	4 mph
Conductor Diameter	1" - 3" (includes armor rod) (25 mm - 76 mm)
Performance	4x 1.9kW drive motors direct mounted to wheels All day power provided by 2x 48V 30Ah batteries
Wheels	6 upper wheels; 4x rubber drive wheels electrically driven and 2x composite idlers Each main wheel support rotates laterally for passing yoke plates, insulators & spacers Center main wheels raise/lower so each set of main rollers can be removed from conductors Wheel drive diameter = 6" (152 mm)
Braking	Dynamic provided by electric drive system
Construction	Aluminum Alloy; Welded & Bolted
Occupancy	1 Person

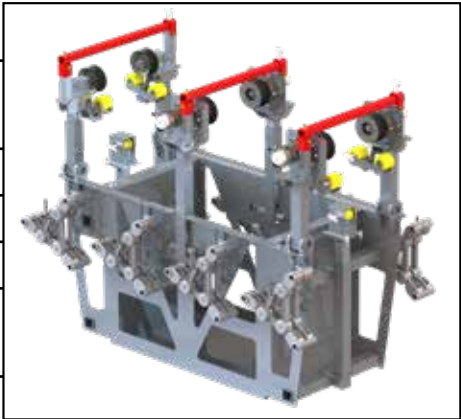

FEATURES

- 20° climb angle; wheels specifically engineered for no slip
- Configured for 3 conductors (18" between conductor)
- Cradle to place Spacer Cart on to the conductors using crane or helicopter
- Retractable hooks for spacer storage
- Customized tool storage
- Battery or gas/hydraulic powered
- Folding seat
- Parking break included
- Vertically actuated lower roller for 3rd conductor
- Electric linear actuators for wheel articulation
- Safety tube secured across wheels in case conductor comes off
- Floor openings less than 0.5"
- 2 or 3 bundles

Contact LineWise to discuss your spacer cart needs!



INSPIRED BY LINEMEN TESTED BY LINEMEN TRUSTED BY LINEMEN

Material and specifications are subject to change without notice. Units in photos may include optional features. Contact a LineWise representative for available options. LineWise® and the LineWise logo are registered trademarks of Fritel & Associates, LLC and may not be used without permission. © 2023 Diversified Product Development All Rights Reserved.