

LINEWISE

*Customized
Electric
Spacer Cart*




Spacer Cart

254-757-1177 | sales@line-wise.com | line-wise.com

SPECIFICATIONS

| | |
|--------------------|--|
| Dimensions | 56" x 91" x 81" tall 1422 mm x 2311 mm x 2057 mm tall |
| Capacity | 600 lb (272 kg) |
| Weight | 950 lb (430 kg) |
| Max Speed | 4 mph |
| Conductor Diameter | 1" - 3" (includes armor rod) (25 mm - 76 mm) |
| Performance | 4x 1.9kW drive motors direct mounted to wheels All day power provided by 2x 48V 30Ah batteries |
| Wheels | 6 upper wheels; 4x rubber drive wheels electrically driven and 2x composite idlers Each main wheel support rotates laterally for passing yoke plates, insulators & spacers Center main wheels raise/lower so each set of main rollers can be removed from conductors Wheel drive diameter = 6" (152 mm) |
| Braking | Dynamic provided by electric drive system |
| Construction | Aluminum Alloy; Welded & Bolted |
| Occupancy | 1 Person |

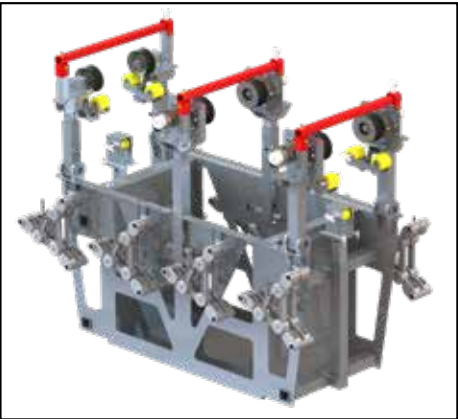

FEATURES

- 20° climb angle; wheels specifically engineered for no slip
- Configured for 3 conductors (18" between conductor)
- Cradle to place Spacer Cart on to the conductors using crane or helicopter
- Retractable hooks for spacer storage
- Customized tool storage
- Battery or gas/hydraulic powered
- Folding seat
- Parking brake included
- Vertically actuated lower roller for 3rd conductor
- Safety tube secured across wheels in case conductor comes off
- Floor openings less than 0.5"
- 2 or 3 bundles

Contact LineWise to discuss your spacer cart needs!



INSPIRED BY LINEMEN TESTED BY LINEMEN TRUSTED BY LINEMEN

Material and specifications are subject to change without notice. Units in photos may include optional features. Contact a LineWise representative for available options. LineWise® and the LineWise logo are registered trademarks of Fritel & Associates, LLC and may not be used without permission.
© 2023 Diversified Product Development All Rights Reserved.