

U.S. Patent No. 11927026

LINEWISE[®]


Pole Brace



254-757-1177 | sales@line-wise.com | line-wise.com

Our unique patent-pending Pole Brace system consists of a minimum of 2 and up to a maximum of 4 braces depending on the weight for each pole that is being stabilized. The pole braces are first chained or strapped to the base section of a pole. Then, the anchor plates are staked into the ground and the pole is then plumb by simply extending or retracting the braces. The entire process can be completed in several minutes.

CONFIGURATIONS

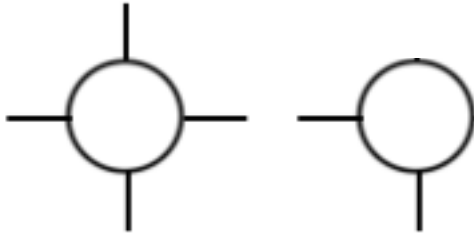

FEATURES

- Enables you to quickly set up, plumb and hold a concrete or steel pole in place during construction, without the use of a forklift/telehandler or deadman concrete anchors
- High strength steel and heavy-duty braces
- Fully retracted at 7'-6" in length so can be stowed in a truck bed or gooseneck trailer
- Requires no routine maintenance
- Simple, quick and easy to use design that can be set up in minutes
- Provides for the reduction of job-site hazards associated with moving equipment

SPECIFICATIONS

Total unit weight (Approx.)	95 lb (43 kg)	
Working Load Limit	Retracted	9750 lb (4423 kg)
	Extended	6600 lb (2994 kg)
Length	Retracted	7'-6" (2286 mm)
	Extended	14' (4267 mm)
Max. Pole Diameter	6' (1829 mm)	
Max. Pole Weight	30,000 lb (13608 kg)	
Max. Pole Length	65' (19812 mm)	
Min. Percentage Embedded*	60%	

*Percentage Embedded = (Hole Depth/Pole Length) X 100



INSPIRED,
TESTED,
AND TRUSTED
BY LINEWORKERS



LineWise

Material and specifications are subject to change without notice. Units in photos may include optional features. Contact a LineWise representative for available options. LineWise® and the LineWise logo are registered trademarks of Fritel & Associates, LLC and may not be used without permission.
© 2025 Diversified Product Development All Rights Reserved.



254-757-1177 | sales@line-wise.com | line-wise.com