




Single Conductor Line Cart

- 300 lb. capacity
- Operator propelled
- Weighs 80 lb.

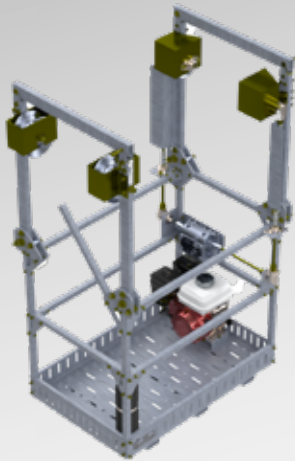

Horizontal Double Bundle Line Cart

- 400 lb. capacity
- 18" horizontal bundle spacing
- Operator & gas powered
- Weighs 200 lb. w/engine
- Weighs 100 lb. w/o engine



Tri Bundle Line Cart

- 600 lb. capacity
- Electric powered
- Weighs 950 lb.



Swing Gate Wire Holders

- 300 lb. side & downward load; 100 lb. gate load
- 750 lb. side & downward load; 200 lb. gate load
- 2500 lb. side & downward load; 500 lb. gate load
- 4000 lb. side & downward load; 1000 lb. gate load
- Used on BOTH vertical & horizontal construction with the gate loaded

Low Profile Conductor Lifters

- Up to 4,000 lb.



Underground Pulling Sheaves

- Rated to safely pull three 1,000 MCM cables at the same time
- 30,000 lb. hoist ring rating
- 31" diameter



Tower Platform

- Crane or helicopter deployed
- 600 - 1,000 lb. capacity
- 20', 30', or 40' long
- Customized to your specifications



700 Research Ave.
Waco, TX 76705

254-757-1177
www.line-wise.com
sales@line-wise.com
©2025 Diversified Products



**INSPIRED,
TESTED,
AND TRUSTED
BY LINEWORKERS**


Material and specifications are subject to change without notice. Units in photos may include optional features. Contact a LineWise representative for available options.

LineWise® and the LineWise logo are registered trademarks of Fritel & Associates, LLC and may not be used without permission.

© 2025 Diversified Product Development All Rights Reserved.




Utility Products

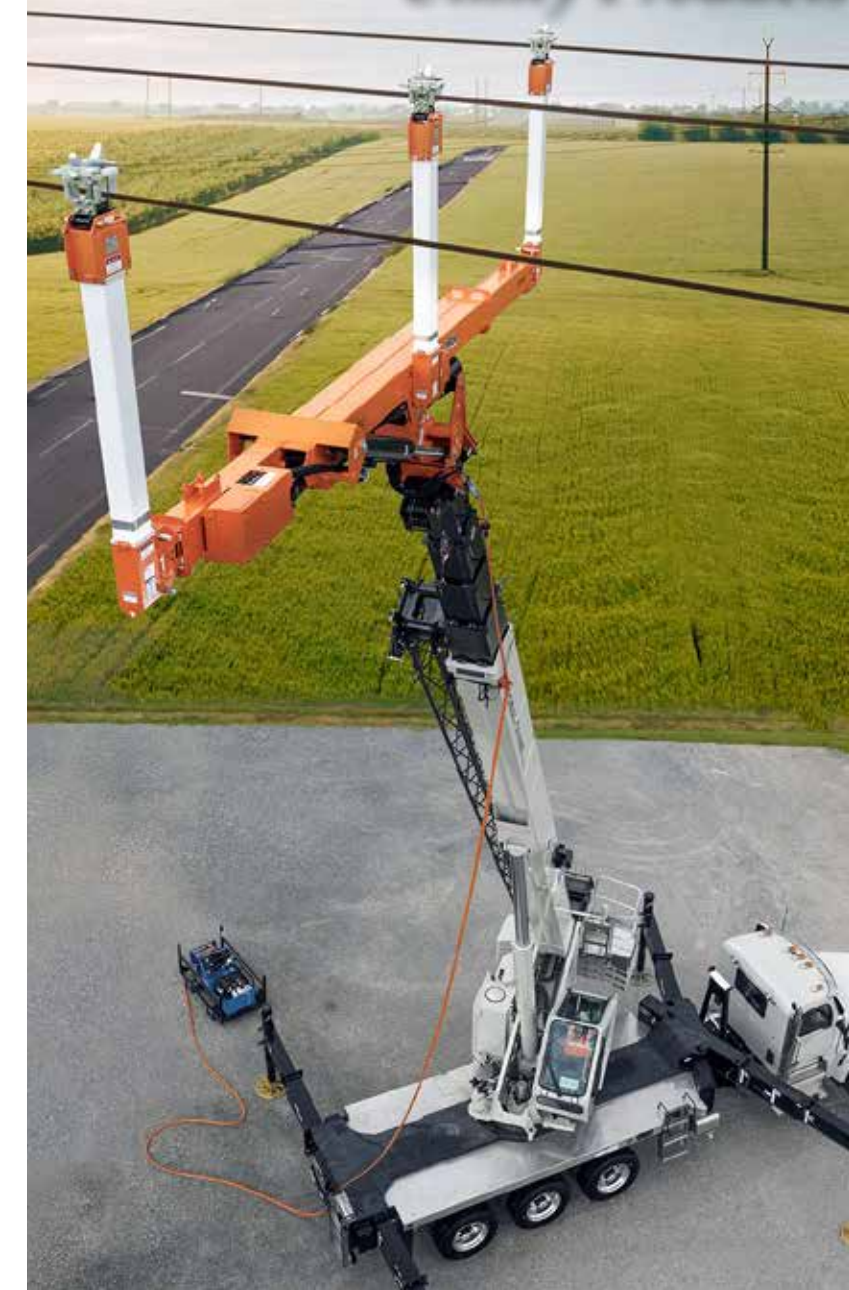



Triple Line Lifters

- 7.5 kV - 765 kV
- Handheld radio remote control
- Vertical & horizontal construction
- Hydraulic articulation, extension & retraction
- For digger derricks, cranes and boom trucks

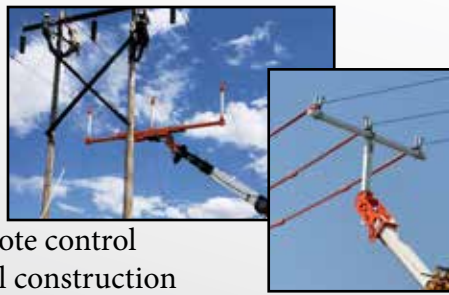

Manual/Hydraulic Energized Line Lifters

- Up to 345 kV
- Up to 8,000 lb.
- 1, 2, or 3 conductors per phase



Insulated Work Platforms

- Up to 765 kV barehand work
- Converts regular crane into barehand unit
- Working height up to 209'
- 1,200 lb. basket capacity
- Conductor lifter option



Insulator Spreaders

- Up to 765 kV
- Non-insulated tool to remove/install dead-end insulator strings



Guard Arms

- Up to 1,200 lb.
- Mounts to boom trucks/digger derricks/telehandlers



Hot Line Base Plate

- Up to 4,000 lb.
- Temporarily holds a conductor in place during planned or emergency repairs



Bundle Lifters

- Up to 365 kV
- Up to 3,500 lb.
- Keeps the yoke plate in the vertical position




Roller Lifters

- 2,000 to 10,500 lb.
- single/dual/triple/heavy duty



Hot Stick Holders

- Mounts to bucket truck boom
- 2, 9 and 10 stick options



SAG Plates

- Sag and terminate conductors off the dead-end yoke plate
- 25,000 lb. capacity
- Eliminates excess rigging



Hot Jibs

- *CERTIFIED HOT TOOL*
- Capacity = same as OEM



Buddy Bushing

*****PROBLEM*****

Erosion of the attachment hole in the arm due to vibrations

****SOLUTION****

Buddy Bushing inserted into attachment hole in cross arm



- Pole Braces
- Up to 30,000 lb.
- Max pole diameter: 6'
- Max pole length: 65'



Slip Joint Pole Jacks

- Holds equipment needed to jack the pole sections together by supporting the cylinders on one end and the engine/hydraulic pump on the other.



Pole Sitters

- Up to 3,000 lb.
- Safer and superior to standard hole cribbing



Pole Pullers

- Up to 120,000 lb.
- Unique jaws to grab pole
- Stub puller attachment

