

254-757-1177 | sales@line-wise.com | line-wise.com

## **SPECIFICATIONS**

Total unit weight (Approx.)	
HLL-10-4000 with skid	2393 lb (1085 kg)
HLL-10-4000 w/o skid	1376 lb (624 kg)
Capacity	up to 4000 lb (1814 kg)
Transverse Horizontal Load Capacity	Capacity per phase
Single Phase Attachment	600 lb (272 kg)
Double Phase Attachment	300 lb (136 kg)
Phase Spacing	
Dual Wire Holder	18" (457 mm)
Overall Length	14' 6" (4420 mm)
Clear Span Fiberglass	10' (3048 mm)
Articulation	120 degrees
Hydraulic	Yes
Mounting	Boom Truck/Crane




## **OPTIONS**

- Operational by hydraulics on crane
- Current leakage monitor system
  - Fully covered skid

## **FEATURES**

- Self-contained hydraulic power unit (HPU)
- Hydraulic articulation
- Corona ring
- Test band and test band shield
- Operated by radio remote control
- Works within the load and stability capabilities of the crane.
- Completely sealed using the LineWise desiccant canister system
- High strength steel and fiberglass fabrication
- Vinyl cover to protect insulated section included
- Operation, maintenance and parts manual included
- Transportation skid

## **Transportation Skid**

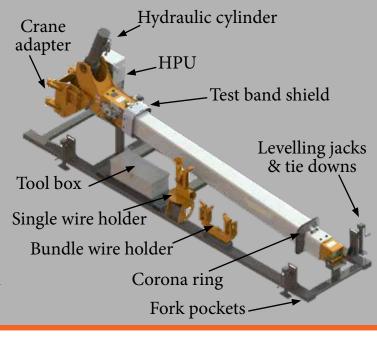















Material and specifications are subject to change without notice. Units in photos may include optional features. Contact a LineWise representative for available options. LineWise® and the LineWise logo are registered trademarks of Diversified Product Development and may not be used without permission. © 2025 Diversified Product Development All Rights Reserved.

