

The TLL-500 is an energized conductor supporting tool that helps to create work clearances for lines up to 72.5kV.

The TLL-500

- Maximum capacity of 500 pounds (225 kg) per phase for a total capacity of 1500 pounds (680 kg).
- Tangent loading of 500 (225 kg) pounds per phase.
- Faster set up time.
- Replaces the need for temporary structures and tag lines while giving positive control of distribution live lines.
- Ability to capture phases and neutrals/statics with the same crane/digger derrick. Reducing the equipment needed at a job site and further eliminates shutdown of sub-transmission lines for maintenance.
- One base unit can fit multiple crane/digger derrick models with additional adapters and load charts.



FEATURES


- More capacity, features and degrees of movement than the standard Auxiliary Arm
- Crossarm can be offset to one end (Alley Arm)
- Operation, Maintenance and Parts manual included
- Vertical and horizontal line construction
- High strength steel fabrication
- Positive lock every 15° of horizontal rotation, relative to crossarm
- Conductor holder can be set at 3 inch (76 mm) increments
- Horizontal and vertical configurations are possible from 0° to 80° boom angle.
- Installed at ground level
- Crossarm end guard for added security
- Insulation
 - Primary = length of fiberglass mast
 - Phase to Phase = spacing of wire holders on fiberglass crossarm




SPECIFICATIONS

Voltage (#) Phases up to 72.5kV (3) phases	Capacity per phase 500 lb (225 kg)/1500 (680 kg) total
Total unit weight (Approx.) 9' (2743 mm) crossarm with 1' (305 mm) mast	433 lb (196 kg)
9' (2743 mm) crossarm with 3' (914 mm) mast	448 lb (203 kg)
12' (3658 mm) crossarm with 1' (305 mm) mast	455 lb (206 kg)
12' (3658 mm) crossarm with 3' (914 mm) mast	470 lb (213 kg)
Max. Phase Spacing 9' (2743 mm) crossarm	4.5' (1372 mm)
12' (3658 mm) crossarm	6' (1829 mm)
Min. Phase Spacing	determined by min. phase to ground spacing for kV being worked
Max. Horiz. Load/Phase	Terex 500 lb (225 kg) Altec 300 lb (136 kg)
Max. Vertical Load/Phase	Terex 500 lb (225 kg) Altec 300 lb (136 kg)
Hydraulic	No
Mounting	Crane/Digger Derrick/Knuckle Boom

CONFIGURATIONS

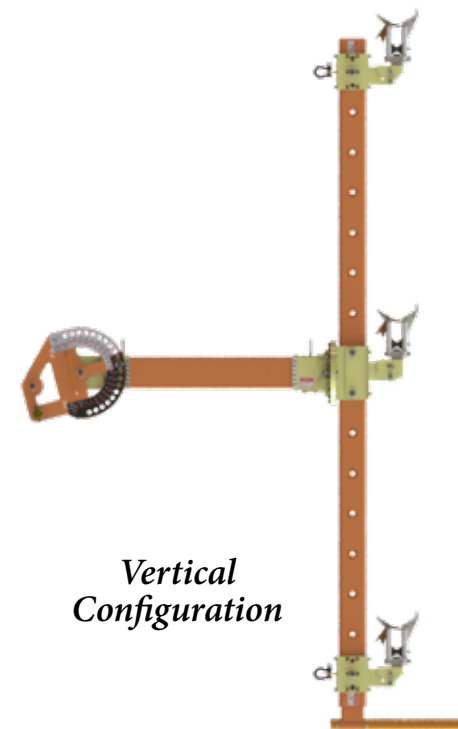

Vertical Configuration

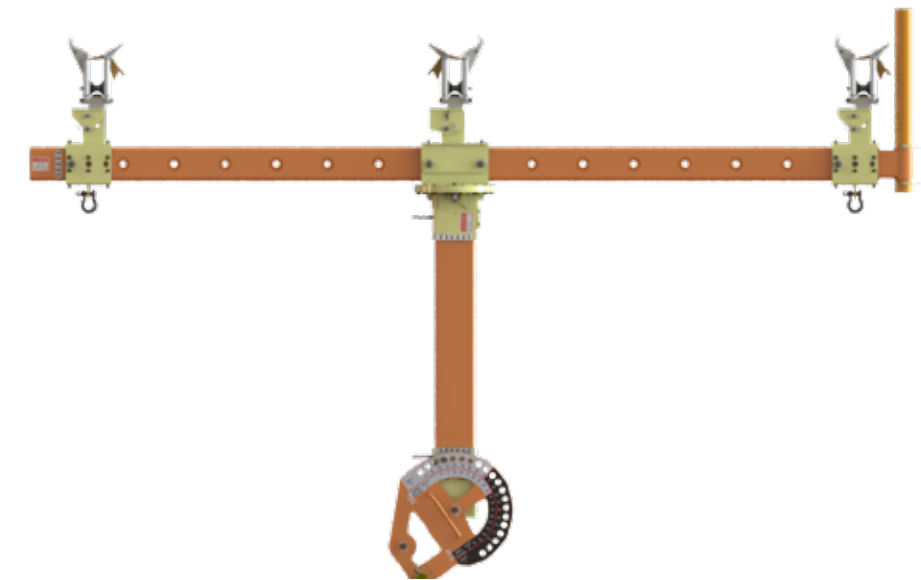



Horizontal Configuration

OPTIONS

- Masts are available in lengths of 1' (305 mm) and 3' (914 mm)
- Crossarms are available in lengths of 9' (2743 mm) and 12' (3658 mm)
- 34.5kV/69kV sealed fiberglass insulators
- Job boxes available for 1' (305 mm) mast, wire holders and most adapters
- Custom aluminum case available for 9' (2743 mm) and 12' (3658 mm) crossarms



Adapter examples

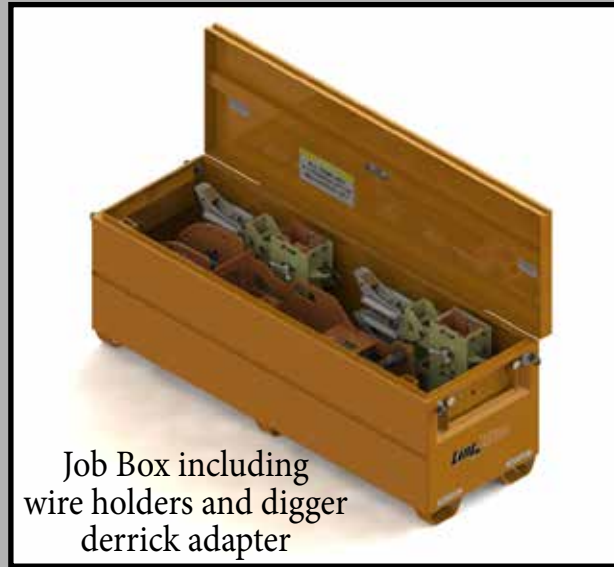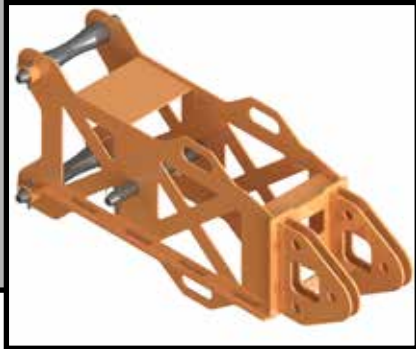

INSPIRED,[™]
TESTED,
AND TRUSTED
BY LINEWORKERS



LINEWISE

Triple Line Lifter Model TLL-500

Material and specifications are subject to change without notice. Units in photos may include optional features. Contact a LineWise representative for available options. LineWise® and the LineWise logo are registered trademarks of Fritel & Associates, LLC and may not be used without permission.
© 2025 Diversified Product Development All Rights Reserved.