

LineWise

Aux Arm




254-757-1177 | sales@line-wise.com | line-wise.com

SPECIFICATIONS

Maximum Voltage	69kV
Total unit weight (Approx.)	270 lb (122.5 kg)
Horizontal Configuration	
Max Load per Phase	
Balanced	450 lb (204 kg)
Tangent Line Load	65 lb (26 kg)
Unbalanced	300 lb (136 kg)
Tangent Line Load	45 lb (20 kg)
Vertical Configuration	
Max Load per Phase	
Per Wireholder	300 lb (136 kg)
Tangent Line Load	45 lb (20 kg)
Clear Span Fiberglass	
Crossarm	12' (3658 mm)
Vertical Mast	3' (914 mm)
Hydraulic	No
Mounting	Digger Derrick


FEATURES

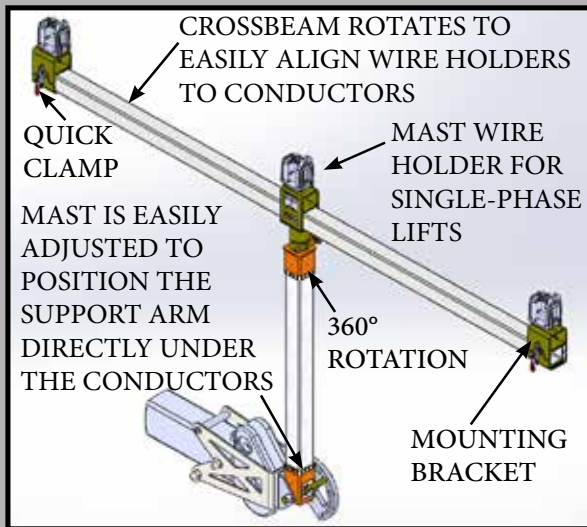

OPTIONS



- Conductor holder (standard/heavy duty)
- Neutral wire support
- Double circuit option
- Insulated with desiccant canister system
- Increased load capacities available
- Mastless unit
- Adapter to use with different cranes

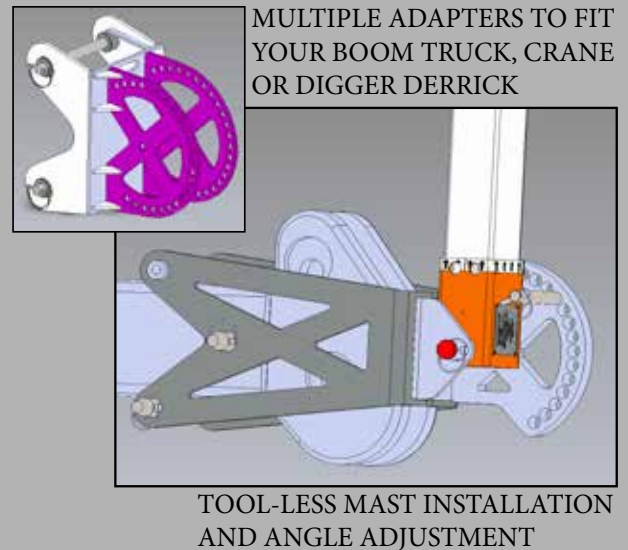

LineWise



INSPIRED BY LINEMEN TESTED BY LINEMEN TRUSTED BY LINEMEN

Material and specifications are subject to change without notice. Units in photos may include optional features. Contact a LineWise representative for available options. LineWise® and the LineWise logo are registered trademarks of Fritel & Associates, LLC and may not be used without permission.
© 2025 Diversified Product Development All Rights Reserved.



254-757-1177 | sales@line-wise.com | line-wise.com