



TRI-BUNDLE INSULATOR SPREADERS

MODEL	IS-3-172	IS-3-198	IS-3-273	IS-3-153.5
Overall Dimensions				
Collapsed	139" x 6" x 17" 3531 x 152 x 432 (mm)	156" x 6" x 16" 3962 x 152 x 406 (mm)	282" x 6" x 17" 7163 x 152 x 432 (mm)	120" x 6" x 17" 3048 x 152 x 432 (mm)
Extended	178" x 6" x 17" 4521 x 152 x 432 (mm)	203" x 6" x 16" 5156 x 152 x 406 (mm)	296" x 6" x 17" 7518 x 152 x 432 (mm)	158" x 6" x 17" 4013 x 152 x 432 (mm)
Maximum Spread	172" (4369 mm)	198" (5029 mm)	273" (6934 mm)	153.5" (3899 mm)
Capacity	1500 lb (680 kg)	2000 lb (907 kg)	5500 lb (2495 kg)	2000 lb (907 kg)
Weight	219 lb (99 kg)	1005 lb (456 kg)	961 lb (436 kg)	209 lb (95 kg)
Adjustable	134" to 172" 3404 x 4369 (mm)	151" to 198" 3835 x 5029 (mm)	257" to 273" 6528 x 6934 (mm)	115" to 153.5" 2921 to 3899 (mm)
Compatible with Dual Bundle	Yes	Yes	Yes	Yes
Compatible with Tri Bundle	Yes	Yes	Yes	Yes
Stroke	9.13" (232 mm)	9.13" (232 mm)	14" (356 mm)	9.13" (232 mm)
Part Number	72272-03	72272-06	72272-08	72272-11



DUAL-BUNDLE INSULATOR SPREADERS

MODEL	IS-2-93	IS-2-132	IS-2-148
Overall Dimensions			
Collapsed	71" x 6" x 15" 1803 x 152 x 381 (mm)	98" x 6" x 11" 2489 x 152 x 280 (mm)	114" x 6" x 11" 2896 x 152 x 280 (mm)
Extended	98" x 6" x 15" 2489 x 152 x 381 (mm)	136" x 6" x 11" 3454 x 152 x 280 (mm)	153" x 6" x 11" 3886 x 152 x 280 (mm)
Maximum Spread	92.5" (2350 mm)	131.5" (3340 mm)	147.5" (3747 mm)
Capacity	1500 lb (680 kg)	1500 lb (680 kg)	1500 lb (680 kg)
Weight	140 lb (64 kg)	153 lb (69 kg)	172 lb (78 kg)
Adjustable	66" to 92.5" 1676 x 2350 (mm)	93" to 131.5" 2362 x 3340 (mm)	109" to 147.5" 2769 x 3747 (mm)
Compatible with Dual Bundle	Yes	Yes	Yes
Compatible with Tri Bundle	No	No	No
Stroke	9.13" (232 mm)	9.13" (232 mm)	9.13" (232 mm)
Part Number	72272-04	72272-01	72272

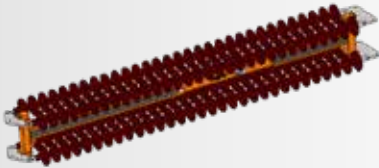

QUAD-BUNDLE INSULATOR SPREADERS

MODEL	IS-4-230	IS-4-150	IS-4-183
Overall Dimensions			
Collapsed	185" x 5" x 23.5" 4699 x 127 x 597 (mm)	121" x 5" x 23.5" 3073 x 127 x 597 (mm)	144.5" x 23.5" x 21.5" 3670 x 597 x 546 (mm)
Extended	233" x 5" x 23.5" 5918 x 127 x 597 (mm)	153" x 5" x 23.5" 3886 x 127 x 597 (mm)	188.5" x 23.5" x 21.5" 4788 x 597 x 546 (mm)
Maximum Spread	230" (5842 mm)	150" (3810 mm)	183" (4648 mm)
Capacity	2500 lb (1134 kg)	2500 lb (1134 kg)	2000 lb (907 kg)
Weight	490 lb (222 kg)	381 lb (173 kg)	470 lb (213 kg)
Adjustable	182" to 230" 4629 x 5842 (mm)	118" to 150" 2997 x 3810 (mm)	139" to 183" 3531 x 4648 (mm)
Compatible with Dual Bundle	No	No	No
Compatible with Tri Bundle	No	No	No
Stroke	8" (203 mm)	8" (203 mm)	8" (203 mm)
Part Number	72272-05	72272-07	72272-10



FEATURES

- Two 6,600 lb. Shackle Anchors (1 on each end to assist in lifting)
- Cylinder attached to Sliding Arm
- Two Speed Hand Pump



- Adjustments on each end to secure yoke plates
- Adjustable Arm
- Rubber Pads to Protect Bells

OPTIONS

- Tri Bundle Insulator Spreader
- Quad Bundle Insulator Spreader
- Custom capacity/length available



Quad/Tri Bundle Insulator Spreader

**INSPIRED,
TESTED,
AND TRUSTED
BY LINEWORKERS**



Material and specifications are subject to change without notice. Units in photos may include optional features. Contact a LineWise representative for available options. LineWise® and the LineWise logo are registered trademarks of Fritel & Associates, LLC and may not be used without permission.
© 2025 Diversified Product Development All Rights Reserved.

