


FEATURES & SPECIFICATIONS

- Capacity
 - 45,000 lb (20,412 kg) at 2,175 psi (14,996 kPa)
 - 40,000 lb (18,144 kg) at 1,950 psi (13,445 kPa)
- Angle of pull can be adjusted from 50 to 100 degrees
- 87" (2210 mm) long x 38" (965 mm) wide x 60" - 77" (1524 - 1956 mm) tall
- Weight = 1500 lb (680 kg)
- Pulls anchors from 0 in to 18 in (457 mm)
 - Custom reaches are available
- Side Shift: +/- 1.5" (38 mm)
- Skid steer quick attach
- 16" (406 mm) of cylinder stroke
- 12.68" (322 mm) of fine adjustment
- 2" (51 mm) of adjustment for pinning to anchor
- Nominal hydraulic flow: 6 gpm (23 l/min) 18 gpm max (68 l/min)
- Nominal pressure range: 500 - 2175 psi (3447 - 14,996 kPa)



INSPIRED,[™]
TESTED,
AND TRUSTED
BY LINEWORKERS

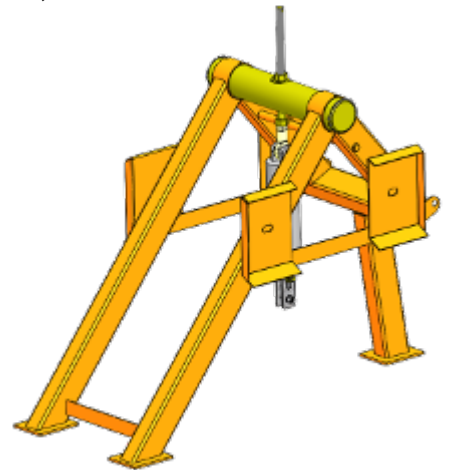

LineWise[®]

Material and specifications are subject to change without notice. Units in photos may include optional features. Contact a LineWise representative for available options. LineWise[®] and the LineWise logo are registered trademarks of Diversified Product Development and may not be used without permission.
 © 2025 Diversified Product Development All Rights Reserved.



254-757-1177 | sales@line-wise.com | line-wise.com