



LIGHTWEIGHT VERTICAL BUNDLE

MODEL	DUAL (RCL-2-1500-12)
Construction	Steel
Bearings	Ball Bearings
Max. Conductor	1.5” (38 mm) OD
Conductor Spacing	12” (305 mm)
Overall Dimensions L x W x H	8.75” x 10” x 33.5” 222 x 254 x 851 (mm)
Sheave Dimensions	6” x 2.5” (152 x 64 mm)
Working Load Limit	1,500 lb (680 kg)
Weight	32 lb (15 kg)
Part Number	79844



VERTICAL BUNDLE W/FIXED 12” SPACING

MODEL	DUAL (RCL-2-3500-12)	DUAL (RCL-2-7000-12)	DUAL (RCL-2-10500-12)
Construction	Steel	Steel	Steel
Bearings	Ball Bearings	Ball Bearings	Ball Bearings
Max. Conductor	1.75” (44 mm) OD	2.5” (64 mm) OD	2.5” (64 mm) OD
Conductor Spacing	12” (305 mm)	12” (305 mm)	12” (305 mm)
Overall Dimensions L x W x H	8.75” x 13.75” x 39” 222 x 349 x 991 (mm)	10.3” x 17.5 ” x 41.3” 262 x 445 x 1049 (mm)	10.6” x 17.5” x 42” 269 x 445 x 1067 (mm)
Sheave Dimensions	7” x 4.75” (178 x 121 mm)	7” x 4.75” (178 x 121 mm)	7” x 4.75” (178 x 121 mm)
Working Load Limit	3,500 lb (1588 kg)	7,000 lb (3175 kg)	10,500 lb (4763 kg)
Weight	56 lb (25 kg)	90 lb (41 kg)	111 lb (50 kg)
Part Number	72725	66038	66007

VERTICAL BUNDLE W/FIXED 18” SPACING

MODEL	DUAL (RCL-2-3500-18)	DUAL (RCL-2-7000-18)	DUAL (RCL-2-10500-18)
Construction	Steel	Steel	Steel
Bearings	Ball Bearings	Ball Bearings	Ball Bearings
Max. Conductor	1.75” (44 mm) OD	2.5” (64 mm) OD	2.5” (64 mm) OD
Conductor Spacing	18” (457 mm)	18” (457 mm)	18” (457 mm)
Overall Dimensions L x W x H	6” x 12.2” x 46.6” 152 x 310 x 1184 (mm)	7” x 19.2” x 49.3” 178 x 488 x 1252 (mm)	7” x 19.3” x 50.1” 178 x 490 x 1273 (mm)
Sheave Dimensions	7” x 4.75” (178 x 121 mm)	7” x 4.75” (178 x 121 mm)	7” x 4.75” (178 x 121 mm)
Working Load Limit	3,500 lb (1588 kg)	7,000 lb (3175 kg)	10,500 lb (4763 kg)
Weight	46 lb (21 kg)	108 lb (49 kg)	123 lb (56 kg)
Part Number	65052	66039	66008

SINGLE SHEAVE ROLLER LIFTERS

MODEL	SINGLE (RCL-1-2000)	SINGLE (RCL-1-4000)	SINGLE (RCL-1-10000)
Construction	Steel	Steel	Steel
Bearings	Ball Bearings	Ball Bearings	Ball Bearings
Max. Conductor	1.75” (44 mm) OD	2.5” (64 mm) OD	2.5” (64 mm) OD
Conductor Spacing	NA	NA	NA
Overall Dimensions L x W x H	7” x 10” x 21” 178 x 254 x 533 (mm)	7” x 12” x 24” 178 x 305 x 610 (mm)	7” x 14” x 25” 178 x 356 x 635 (mm)
Sheave Dimensions	7” x 3” (178 x 76 mm)	7” x 4.75” (178 x 121 mm)	7” x 4.75” (178 x 121 mm)
Working Load Limit	2,000 lb (907 kg)	4,000 lb (1814 kg)	10,000 lb (4536 kg)
Weight	15 lb (7 kg)	45 lb (20 kg)	53 lb (24 kg)
Part Number	61150	64140	68630




HORIZONTAL BUNDLE W/ADJUSTABLE SPACING 12” TO 18”

MODEL	DUAL (RCL-2-3500-12-18)	DUAL (RCL-2-7000-12-18)	DUAL (RCL-2-10500-12-18)
Construction	Steel	Steel	Steel
Bearings	Ball Bearings	Ball Bearings	Ball Bearings
Max. Conductor	1.75” (44 mm) OD	2.5” (64 mm) OD	2.5” (64 mm) OD
Conductor Spacing	12” or 18” (305 or 457 mm)	12” or 18” (305 or 457 mm)	12” or 18” (305 or 457 mm)
Overall Dimensions L x W x H	8.5” x 27.9” x 41.3” 216 x 709 x 1049 (mm)	9.6” x 29.4” x 43.1” 244 x 747 x 1095 (mm)	10.2” x 29.4” x 43.9” 259 x 747 x 1115 (mm)
Sheave Dimensions	7” x 4.75” (178 x 121 mm)	7” x 4.75” (178 x 121 mm)	7” x 4.75” (178 x 121 mm)
Working Load Limit	3,500 lb (1588 kg)	7,000 lb (3175 kg)	10,500 lb (4763 kg)
Weight	97 lb (44 kg)	139 lb (63 kg)	158 lb (72 kg)
Part Number	65053	66037	66006



FEATURES

- Steel Construction
- Ball Bearing Steel Sheaves
- Gates Secure Conductor
- Welded to AWS D1.1
- Power Coat Finish

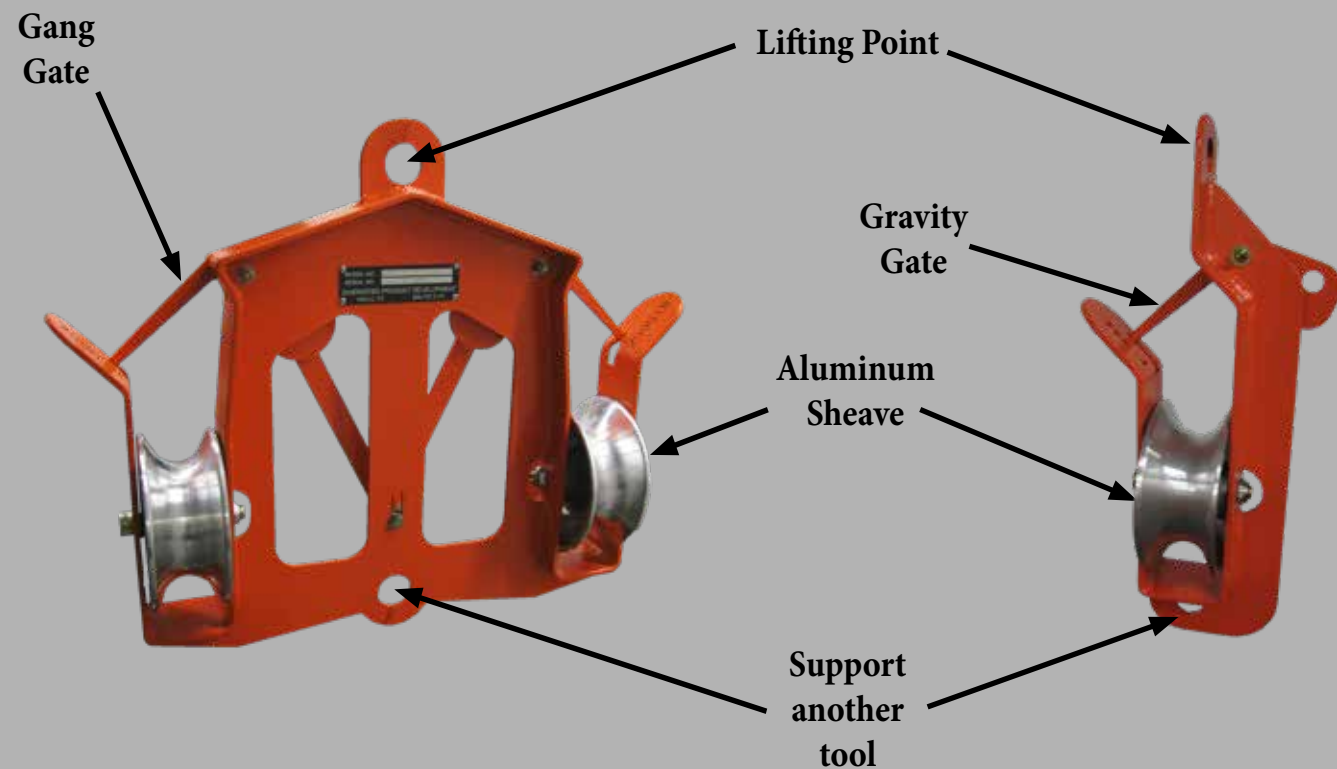

**INSPIRED,
TESTED,
AND TRUSTED
BY LINEWORKERS**



LineWise

LineWise

Roller Conductor Lifter



Material and specifications are subject to change without notice. Units in photos may include optional features. Contact a LineWise representative for available options. LineWise® and the LineWise logo are registered trademarks of Fritel & Associates, LLC and may not be used without permission.
© 2025 Diversified Product Development All Rights Reserved.

LW 254-757-1177 | sales@line-wise.com | line-wise.com

254-757-1177 | sales@line-wise.com | line-wise.com