

LINEWISE

Bundle Lifter



254-757-1177 | sales@line-wise.com | line-wise.com

SPECIFICATIONS


PART NUMBER	62574	71590	77471	78634
Insulated Length	10' (3048 mm)	10' (3048 mm)	12' (3658 mm)	12' (3658 mm)
Overall Length	12' (3658 mm)	11' 9" (3581 mm)	13' 6" (4115 mm)	13' 6" (4115 mm)
Overall Depth	2' (610 mm)	2' 8" (813 mm)	2' 7" (787 mm)	2' 7" (787 mm)
Overall Width	1' 2" (356 mm)	1' 2" (356 mm)	1' 2" (356 mm)	1' 2" (356 mm)
Max. Load Capacity	3500 lb (1588 kg)	7000 lb (3175 kg)	7000 lb (3175 kg)	10500 lb (4763 kg)
Assembly Weight	125 lb (57 kg)	203 lb (92 kg)	220 lb (100 mm)	231 lb (105 kg)
Attachment Hole Diameter	2" (610 mm)	2" (610 mm)	2" (610 mm)	2" (610 mm)
Max. Yoke Plate Thickness	0.75" (19 mm)	1.13" (29 mm)	1.13" (29 mm)	1.13" (29 mm)



FEATURES

- Device that can be suspended from boom trucks or cranes to provide electrical insulation while supporting the yoke plate
- Keeps the yoke plate in a vertical position so the insulator string can be connected easily
- High strength steel reduces overall weight
- Heavy duty construction provides a rugged bundle lifter
- Narrow design aids in picking up the bundle
- Gravity gate secures the yoke plate in place
- Consists of (3) foam-filled fiberglass tubes held together by high strength steel weldments which are bonded and bolted to the ends of the fiberglass.

Gate secures the yoke plate

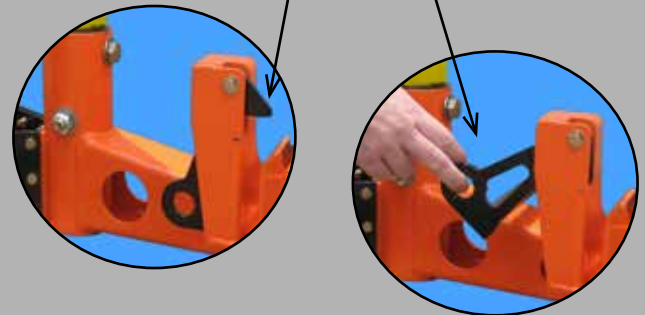

INSPIRED,
TESTED,
AND TRUSTED
BY LINeworkERS



LineWise

Material and specifications are subject to change without notice. Units in photos may include optional features. Contact a LineWise representative for available options. LineWise® and the LineWise logo are registered trademarks of Diversified Product Development and may not be used without permission.
© 2026 Diversified Product Development All Rights Reserved.



254-757-1177 | sales@line-wise.com | line-wise.com