



LINEWISE

TLL-3000D

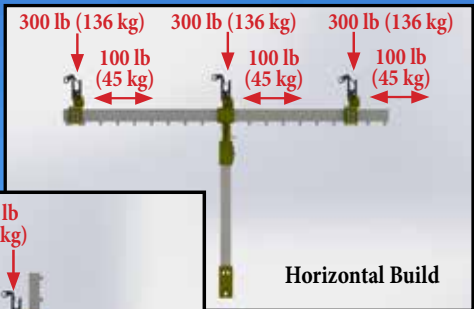

Horizontal Build

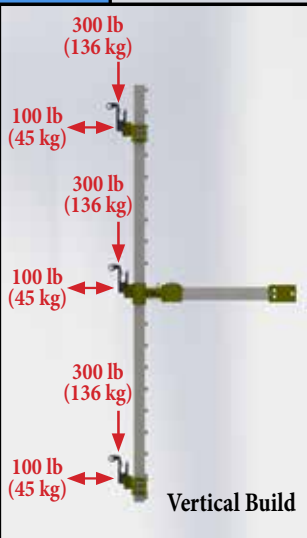

Vertical Build



254-757-1177 | sales@line-wise.com | line-wise.com

SPECIFICATIONS

	TLL-300D	
	<i>with 8' crossarm (2438 mm)</i>	<i>with 10' crossarm (3048 mm)</i>
Voltage (#) Phases up to 34.5kV (3) phases	Capacity per position 300 lb (136 kg) per position (max) 900 lb (408 kg) total (3 phases) 100 lb (45 kg) horizontal load per position 300 lb (136 kg) total horizontal load	Capacity per position 300 lb (136 kg) per position (max) 900 lb (408 kg) total (3 phases) 100 lb (45 kg) horizontal load per position 300 lb (136 kg) total horizontal load
Max Phase Spacing Outside to Outside Center to Outside	7' 7" (2311 mm) 3' 8" (1118 mm)	9' 7" (2921 mm) 4' 8" (1422 mm)
Min Phase Spacing Outside to Outside Center to Outside	1' 7" (483 mm) 8" (203 mm)	1' 7" (483 mm) 8" (203 mm)
Total Unit Weight (Approx): crossarm, mast & 3 wire holder brackets	- 8' crossarm with 31" clear span mast = 137 lb (2438 mm with 787 mm = 62 kg) * Plus 60-135 lb (27-61 kg) for adapter	- 10' crossarm with 31" clear span mast = 146 lb (3048 mm with 787 mm = 66 kg) * Plus 60-135 lb (27-61 kg) for adapter
Phase to Ground	clear span fiberglass varies by dash number	clear span fiberglass varies by dash number
Hydraulic Articulation	No, manual adjustment only	No, manual adjustment only
Lifting Device Needed	Digger Derrick or Crane	Digger Derrick or Crane
Orientation	Horizontal or Vertical	Horizontal or Vertical

FEATURES

- Horizontal or Vertical construction
- Mounts to digger derrick or crane with adapter
- Crossarm & mast are composed of fiberglass for di-electric properties
- 10-minute set up time = 2 linemen and no tools required
- Fiberglass is sealed using LineWise desiccant canister system
- No Cross Bracing Required
- Swing Gate Wire Holder option: 300 lb (136 kg) downward load; 100 lb (45 kg) side & gate load
- Crossarm is pinned to the mast
 - crossarm can rotate 15° each direction from 0° (in line with the boom) and also 15° each direction from 90° to the boom

Gravity gate for easy
capture & release of wire




Roller Wire
Holder



Swing Gate
Wire Holder

Wire holder spacing can be
easily adjusted with no tools
in 3" (76 mm) increments

Wear pads protect
the fiberglass



INSPIRED,[®]
TESTED,
AND TRUSTED
BY LINEWORKERS



LineWise[®]

Material and specifications are subject to change without notice. Units in photos may include optional features. Contact a LineWise representative for available options. LineWise[®] and the LineWise logo are registered trademarks of Fritel & Associates, LLC and may not be used without permission.

© 2026 Diversified Product Development All Rights Reserved.

U.S. Patent No. 11,870,233



254-757-1177 | sales@line-wise.com | line-wise.com