U.S. Patent No. 8,299,357 & 7,750,236

LineWise®

Hot Line Base Plate



254-757-1177 | sales@line-wise.com | line-wise.com


SPECIFICATIONS


- 1600lb (726 kg) /4000lb (1814 kg) Capacity
- Rated to hold energized conductors

******Insulator(s) supplied by Customer******

FEATURES

Upper attachment assembly installs using 1 heavy duty strap

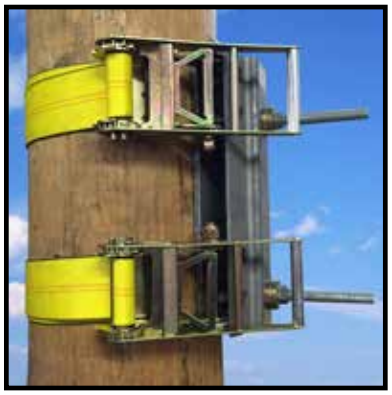

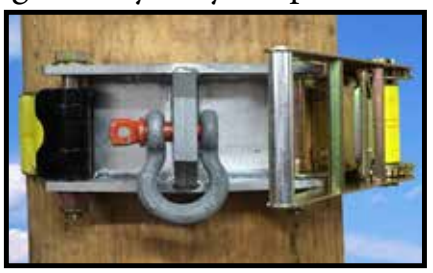

Lower attachment assembly installs using 2 heavy duty straps

Chaffing pads/strap protectors are provided to reduce the likelihood of damage to the straps



BENEFITS

- **Safety**
- **Reliability Improvements**
- **Process Improvement**
- **Risk Mitigation**
- **Overall Cost Reduction on Repairs**
- **Simplification**

OPTIONS

- *Roller Lifter Option*
  - Quickly & easily attaches to a poly insulator
  - 4,000lb (1814 kg) Capacity
  - 360 degree swivel base
  - Automatic gate closer
- *Triangulated Bracing Option*
  - 4000lb (1814 kg) Capacity
  - Easy strap on installation





INSPIRED,® TESTED, AND TRUSTED BY LINEWORKERS

LineWise®

Material and specifications are subject to change without notice. Units in photos may include optional features. Contact a LineWise representative for available options. LineWise® and the LineWise logo are registered trademarks of Fritel & Associates, LLC and may not be used without permission.
© 2026 Diversified Product Development All Rights Reserved.