

The TLL-500A-S3 is an insulated crane/digger derrick attachment used to support up to three energized lines.

The TLL-500A-S3

- Maximum capacity of 500 pounds (227 kg) per phase for a total capacity of 1500 pounds (680 kg).
- Faster set up time.
- Radio remote provides the crew in the bucket with complete control of the unit's functions and avoids having to relay desired movements to ground personnel working the controls.
- Ability to capture phases and neutrals/statics with the same crane/digger derrick. Reducing the equipment needed at a job site and further eliminates shutdown of sub-transmission lines for maintenance.
- One base unit can fit multiple crane/digger derrick models with additional adapters and load charts.



FEATURES

- Hydraulic articulation, extension & retraction
- Quick attach insulators & wire holders
- Insulators are lab tested
- Operation, Maintenance and Parts manual included
- Custom load charts for your crane/digger derrick model(s)
- Vertical and horizontal line construction
- High strength steel fabrication
- Holding valves on all cylinders
- Manual override control valve
- Handheld radio remote control
- Installed at ground level



Hydraulic Power Unit

- 2,600 psi (17926 kPa) and 4 gpm (15 l/min)
- Gasoline engine 7.5HP (5593 watt)/ electric start

Transportation Skid

- Fork pockets
- Compartments for:
 - Insulators, wire holders & pins
- 4 corner jacks to level skid to crane
- Lift rigging and tie down points




SPECIFICATIONS

Voltage (#) Phases	Capacity per phase
34.5 kV (3) phases	500 lb (227 kg)/1500 (680 kg) total
72.5 kV (3) phases	500 lb (227 kg)/1500 (680 kg) total
Total unit weight (Approx.)	
TLL-500A-S3 with skid	2075 lb (941 kg)
TLL-500A-S3 w/o skid	1155 lb (524 kg)
Max. Phase Spacing	
Outside to Outside	16' (4877 mm)
Center to Outside	8' (2438 mm)
Min. Phase Spacing	
Outside to Outside	7' 10" (2388 mm)
Center to Outside	3' 11" (1194 mm)
Maximum Horizontal Load per Phase	500 lb (227 kg) 300 lb (136 kg) on Altec
Maximum Vertical Load per Phase	500 lb (227 kg) 300 lb (136 kg) on Altec
Insulator	Polymer
Hydraulic	Yes
Mounting	Crane/Digger Derrick

CONFIGURATIONS




Vertical Configuration

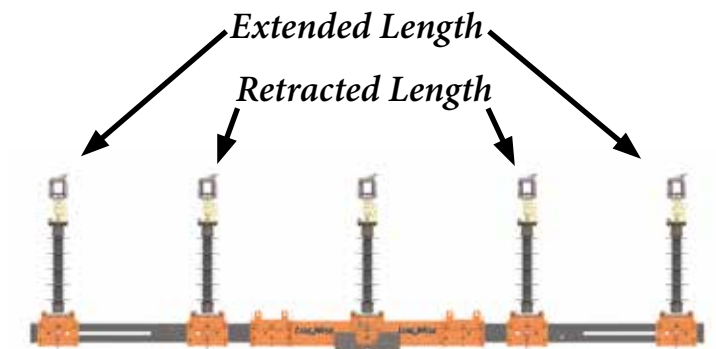


Horizontal Configuration

OPTIONS



- Adapter to use with different crane
- Product operational by hydraulics on crane/ digger derrick or with a separate hydraulic power unit (HPU)
- 34.5kV/72.5kV Sealed Fiberglass Insulators
- Fully covered skid
- Field installation and training with every unit

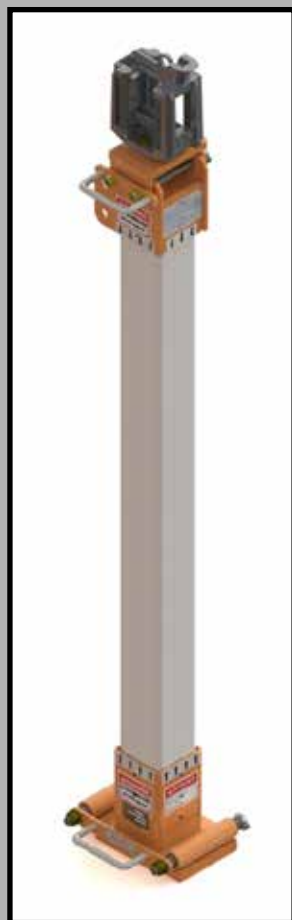

Fiberglass Insulators

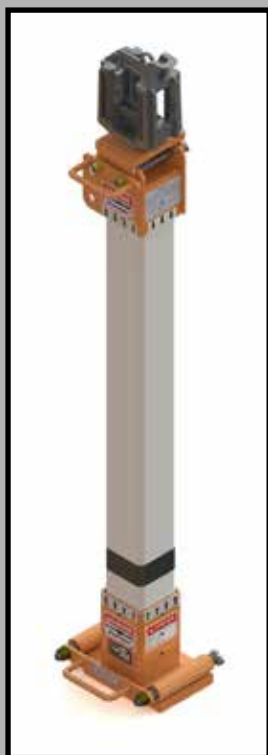

Polymer Insulators

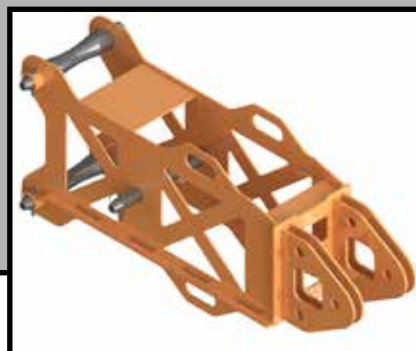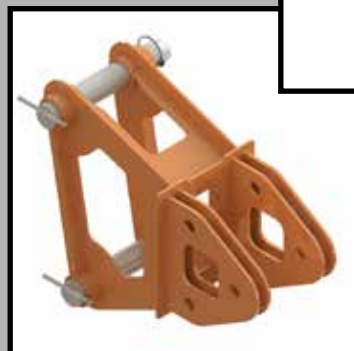

Adapters

INSPIRED,[™]
TESTED,
AND TRUSTED
BY LINEWORKERS



LINEWISE

Triple Line Lifter-500A-Series 3



Material and specifications are subject to change without notice. Units in photos may include optional features. Contact a LineWise representative for available options. LineWise® and the LineWise logo are registered trademarks of Fritel & Associates, LLC and may not be used without permission.
© 2025 Diversified Product Development All Rights Reserved.